





ATAC Solutions Ltd is a leading environmental engineering company based in Maidstone, United Kingdom.

ATAC Solutions is known for its state-of-the-art liquid collection fleet and its expertise in providing bespoke turnkey wastewater process solutions.

With a focus on sustainability and accreditation in ISO 9001 & ISO 14001, the company serves domestic and industrial clients across the South-East and London.



ATAC Solutions Ltd,
Unit A9, Loc 8 Business Park, Ashford Road,
Hollingbourne, Maidstone, England, ME17 1WR

 atacsolutions.com
 01622 882400



Axiom Water companies

FEKAFOS 200

AUTOMATIC PUMPING STATION



WASTE WATER COLLECTION AND LIFTING

Automatic collection and lifting stations, used for collecting and pumping civil and industrial waste water in sewers. Comprises a high density 200 litre polythene tank with removable cover complete with a watertight and gastight seal.

Fekafos series is suitable only for the use of one not automatic single/triphas pump from the following: **FEKA 600 M-NA - FEKA VS-VX 550 M-NA /T-NA - FEKA VS-VX 750 M-NA /T-NA - FEKA VS-VX 1000 M-NA /T-NA - FEKA VS-VX 1200 M-NA /T-NA, GRINDER 1000-1200-1600T, GRINDER 1400 M -1800 T**, to be ordered separately.

Complete with: 2 bulb floats mounted on a stainless steel support, cable holder for connecting the float and pump cables to the electrical panel (**to order separately according to the performance range table**).

Complete with: 2" PVC unions, DN50 and DN110 suction manifolds and 2" delivery manifolds. Complete with connector for DN50 vent tube.

An alarm float can be used on request.


Operating range: from 1 to 32 m³/h with a head of up to 23 m.

Liquid temperature range: +50°C.


Pumped liquid: ground water, rain water, clear waste water, black waste water and water from rivers and lakes.

TECHNICAL DATA

MODEL	CODE	CAPACITY [lt]	DIMENSION [mm]	TO BE USED WITH	DN PIPES [mm]
FEKAFOS 200	60114041	200	750x579x700	FEKA 600 M-NA/T, FEKA VS/VX 550-750-1000-1200 M-NA/T, GRINDER 1000-1200-1600 T, GRINDER 1400 M-1800 T	3x DN110, 1x DN50, 1x DN75 inlet, 1x DN50 ventilation, 1x DN40 emergency emptying

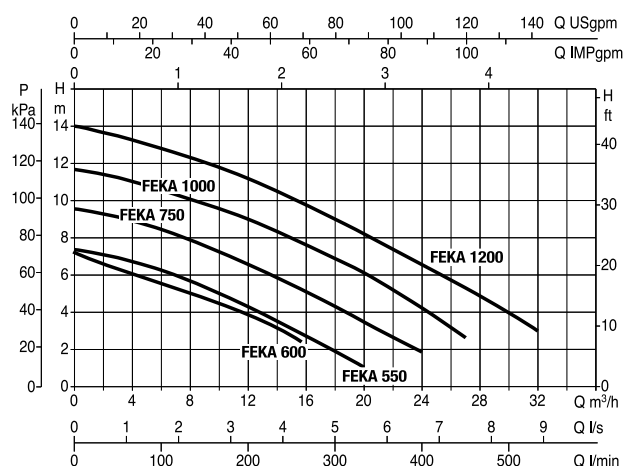

DIMENSIONS AND WEIGHTS

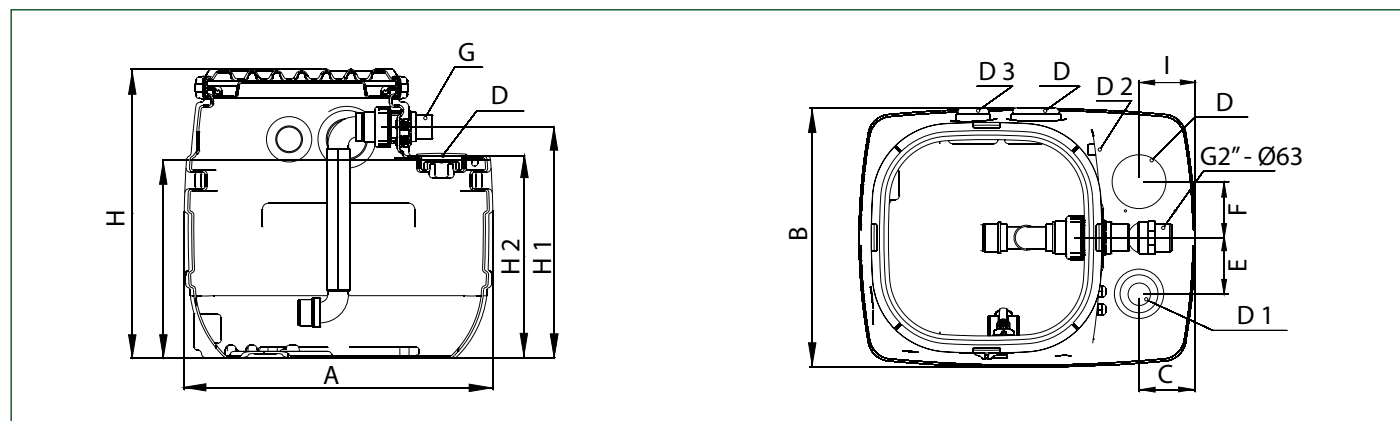

MODEL	A	B	C	D	D1	D2	D3	E	F	G	H	H1	H2	I	WEIGHT KG.
FEKAFOS 200	750	579	124,5	DN 110	DN 50/110	DN 50	DN 75	125	125	2"	700	560	490	124,5	34