



ATAC Solutions Ltd is a leading environmental engineering company based in Maidstone, United Kingdom.

ATAC Solutions is known for its state-of-the-art liquid collection fleet and its expertise in providing bespoke turnkey wastewater process solutions.

With a focus on sustainability and accreditation in ISO 9001 & ISO 14001, the company serves domestic and industrial clients across the South-East and London.



ATAC Solutions Ltd,
Unit A9, Loc 8 Business Park, Ashford Road,
Hollingbourne, Maidstone, England, ME17 1WR

 atacsolutions.com
 01622 882400


     
Axius Water companies

Range of products 400 V/50 Hz.

The right solution every time.



Fields of application: ++ ideally suitable + suitable • suitable only to a limited extent – not suitable **Permanent operation:** 1 suitable 2 suitable only to a limited extent 3 not permitted () Dimensioning by WILO EMU engineering Subject to technical changes. Thrust and power measurement in accordance with ISO 21630.

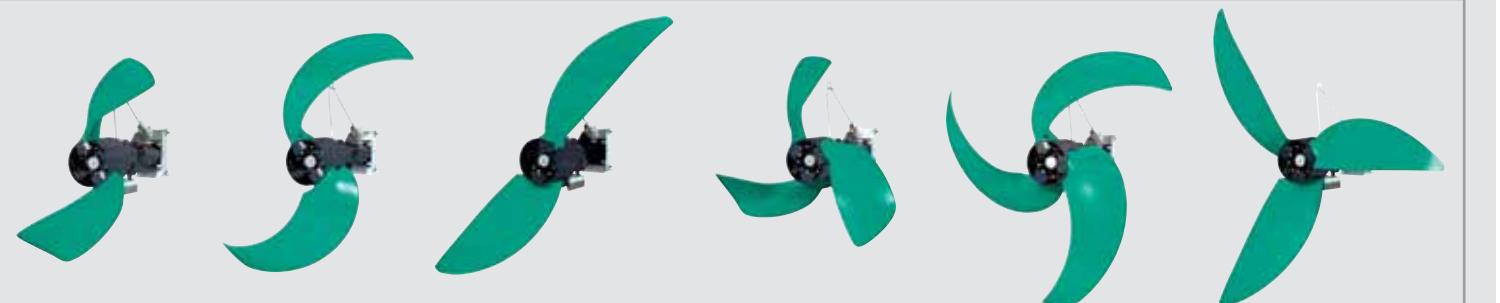

| Maxiprop | | | | | | | | | | | | Megaprop | | | | | | | | | | | | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|--------------|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|--------------|--------------|---------------|-----------------|------|------|----|
| TR215.xx-6/8 | TR215.xx-4/8V | TR215.xx-4/8 | TR215.xx-4/12 | TR221.xx-6/8 | TR221.xx-4/8V | TR221.xx-4/8 | TR221.xx-4/12 | TR226.xx-8/8 | TR226.xx-6/8 | TR226.xx-4/8V | TR226.xx-4/8 | TR226.xx-4/12 | TR315.xx-6/8 | TR315.xx-4/8V | TR315.xx-4/8 | TR315.xx-4/12 | TR321.xx-8/8 | TR321.xx-4/8V | TR321.xx-4/8 | TR321.xx-4/12 | TR326.xx-6/8 | TR326.xx-4/8 | TR326.xx-4/12 | (TR326.xx-4/16) | | | |
| 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | | | | |
| GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | GRP | | | | |
| 1500 | 1500 | 1500 | 1500 | 2050 | 2050 | 2050 | 2050 | 2600 | 2600 | 2600 | 2600 | 2600 | 1500 | 1500 | 1500 | 1500 | 2050 | 2050 | 2050 | 2050 | 2600 | 2600 | 2600 | 2600 | | | |
| 17 | 26 | 40 | 53 | 25 | 33 | 41 | 46 | 57 | 20 | 29 | 35 | 35 | 41 | 17 | 26 | 38 | 40 | 44 | 23 | 33 | 36 | 41 | 49 | 26 | 31 | 41 | 45 |
| 24 | 40 | 44 | 57 | 32 | 39 | 45 | 53 | 59 | 27 | 32 | 39 | 43 | 46 | 24 | 38 | 40 | 44 | 31 | 35 | 39 | 45 | 52 | 30 | 39 | 43 | 47 | |
| 1.75 | 2.50 | 3.50 | 4.50 | 1.10 | 1.75 | 2.50 | 3.50 | 4.50 | 1.10 | 1.75 | 2.50 | 3.50 | 4.50 | 1.75 | 2.50 | 3.50 | 4.50 | 1.10 | 1.75 | 2.50 | 3.50 | 4.50 | 1.75 | 3.50 | 4.50 | 6.50 | |
| 0.60 | 0.90 | 2.50 | 4.90 | 0.60 | 1.20 | 1.70 | 2.50 | 4.20 | 0.68 | 1.36 | 2.48 | 2.52 | 3.65 | 0.60 | 1.10 | 3.40 | 4.60 | 0.70 | 1.50 | 1.80 | 2.50 | 4.00 | 1.74 | 2.20 | 4.42 | 6.11 | |
| 0.80 | 2.50 | 3.30 | 5.80 | 1.10 | 1.70 | 2.00 | 3.70 | 4.90 | 1.19 | 1.82 | 3.13 | 4.01 | 4.89 | 0.90 | 3.10 | 3.40 | 4.60 | 1.30 | 1.80 | 2.30 | 3.20 | 4.90 | 2.08 | 3.92 | 4.98 | 6.41 | |
| 300 | 700 | 1420 | 2400 | 650 | 1200 | 1850 | 2200 | 3400 | 800 | 1670 | 2620 | 2640 | 3440 | 450 | 830 | 1920 | 2450 | 750 | 1450 | 1800 | 2250 | 3250 | 2040 | 2330 | 4030 | 5080 | |
| 630 | 1420 | 1700 | 2560 | 1100 | 1700 | 2150 | 2900 | 3650 | 1430 | 2110 | 3060 | 3670 | 4370 | 750 | 1780 | 1920 | 2450 | 1300 | 1650 | 2100 | 2700 | 3700 | 2260 | 3600 | 4340 | 5270 | |
| 172 | 172 | 172 | 182 | 178 | 178 | 178 | 188 | 177 | 177 | 177 | 177 | 187 | 190 | 190 | 190 | 200 | 199 | 199 | 199 | 199 | 209 | 197 | 197 | 207 | 218 | | |
| ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | | |
| ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | | |
| ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | | |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | |
| + | + | + | + | ++ | ++ | ++ | ++ | ++ | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | |
| + | + | + | + | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | |
| + | + | + | + | ++ | ++ | ++ | ++ | ++ | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | | |
| + | + | + | + | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | | |
| ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | ++ | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | * | | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |



Send us the data on your water treatment system and we will make an individual offer for you! You will receive your own special configuration – energy-efficient, economic and reliable!

Send a fax to Wilo +49 9281-96528

| | |
|----------------------------------------|---------------------------|
| Company: _____ | With the request for |
| <input type="checkbox"/> a selection | _____ |
| <input type="checkbox"/> a price offer | _____ |
| Date: _____ | _____ |
| Fax: _____ | Signature: _____ |
| 1. Selection data | |
| 1.1 Application | |
| <input type="checkbox"/> | 1.2 Aeration |
| <input type="checkbox"/> | 1.2.1 Kind of aeration |
| <input type="checkbox"/> | 1.2.2 Air input |
| <input type="checkbox"/> | 1.2.3 Aerated surface* |
| <input type="checkbox"/> | 1.3 Kind of liquid |
| <input type="checkbox"/> | 1.3.1 pH-value* |
| <input type="checkbox"/> | 1.3.2 Solids content |
| <input type="checkbox"/> | 1.3.3 Temperature |
| <input type="checkbox"/> | 1.3.4 Density* |
| <input type="checkbox"/> | 1.3.5 Viscosity* |
| <input type="checkbox"/> | 1.3.6 Kind of thickening* |
| <input type="checkbox"/> | 1.4 Tank dimensions* |
| <input type="checkbox"/> | 1.4.1 Length x width |
| <input type="checkbox"/> | 1.4.2 Diameter |
| <input type="checkbox"/> | 1.4.3 Liquid depth |
| <input type="checkbox"/> | 1.4.4 Tank depth |
| 1.5 Tank materials | |
| <input type="checkbox"/> | 1.5.1 Concrete |
| <input type="checkbox"/> | 1.5.2 Steel |
| <input type="checkbox"/> | 1.5.3 Others |
| <input type="checkbox"/> | 1.6 Medium flow velocity |
| m/s | |
| 2. Technical data | |
| 2.1 Voltage | |
| <input type="checkbox"/> | ~ 3 / V / Hz |
| 2.2 Starting | |
| <input type="checkbox"/> | Direct |
| <input type="checkbox"/> | Star-delta |
| <input type="checkbox"/> | Others |
| 2.3 Motor control | |
| <input type="checkbox"/> | Winding |
| <input type="checkbox"/> | Sealing chamber control |
| <input type="checkbox"/> | Others |
| 2.4 Ex protection | |
| 2.5 Max. starts per hour | |
| /h | |
| 2.6 Power cable: length | |
| m | |
| 3. Further information | |
| * if available ^ enclose sketch | |